

Rear Bumper Protector











General Fitting instructions



0,10

Fitting temperature

18°C - 30°C

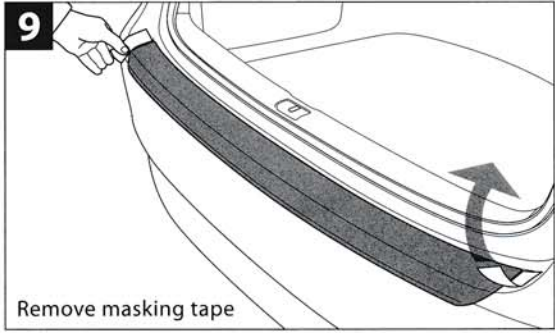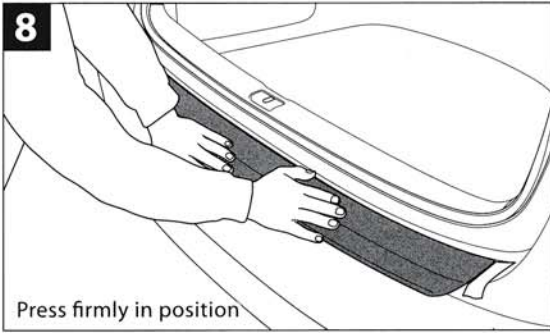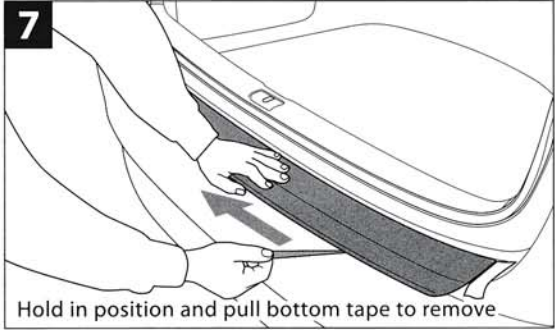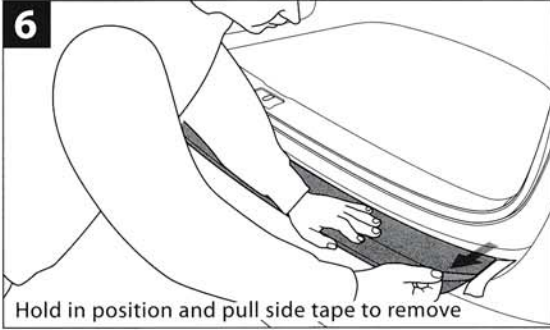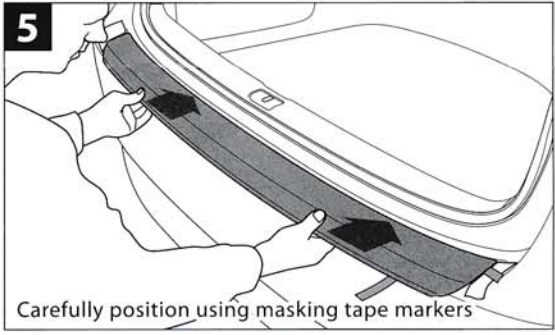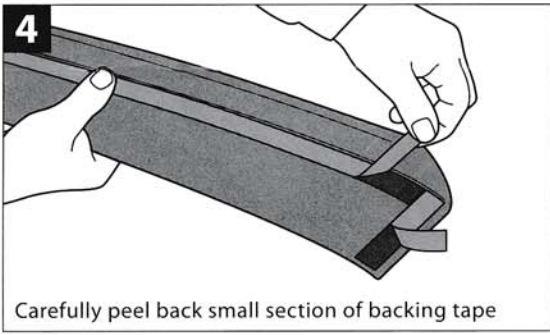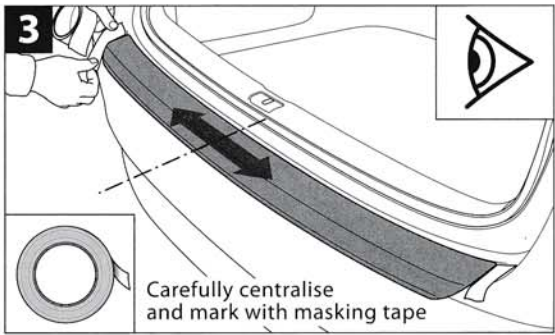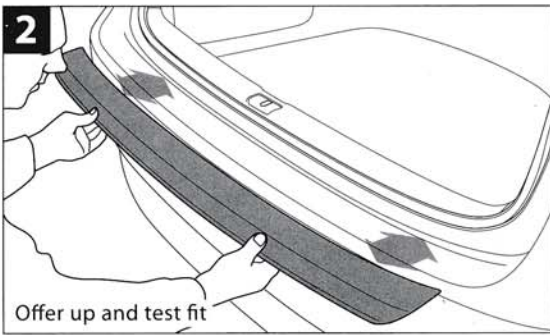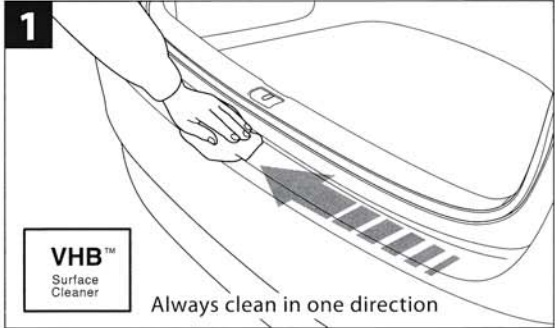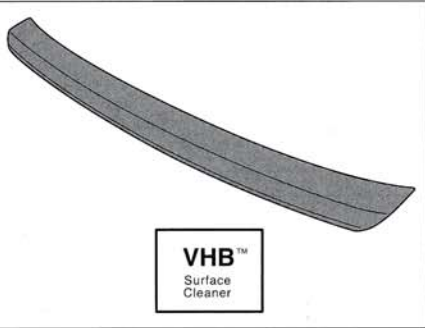

Rear Bumper Protector

Fitting instructions: General hints and tips



Screw fix			
Bolt fix			
Stud fix			
Tape			
Parking sensors			
Clearance			
Washing	<p>Use only water with a proprietary soap or car shampoo for cleaning your REAR BUMPER PROTECTOR. Rinse off with clean water and dry as per the remainder of the bodywork.</p>		



IMPORTANT

DE-GREASING PROCEDURE

Before fitting accessories which are bonded to the vehicle it is necessary to thoroughly clean the area to remove any traces of WAX-POLISH OR SILICONE.

Included with all products are de-greasing sachets which must be used prior to the instalment of products. When wiping it is necessary to wipe in one direction only – left to right – DO NOT wipe backwards and forwards.

Other suitable cleaning solvents are: White Spirit – Carbon Tetrachloride etc. One good product is “Slow Panel Wipe” from UPOL. This allows you to see the area you have cleaned before it evaporates. We also recommend PPG D837 together with D8401. All are available from your local Paint Factor/Wholesaler.

Please remember if you do not de-grease correctly the product will NOT stay on the vehicle.



Check clearance regularly!



GB

Rearguards

Care and Cleaning Instructions for Car Owner

To maintain your Black Rearguard in pristine condition we recommend that you frequently wash off the grime and grease with warm soapy water. A scrubbing brush is ideal as it gets into the fine textured finish. Be careful not to scrub any actual bodywork paint!

Thoroughly dry and then if you wish, apply a silicone based polish. We recommend the following products:

- **Cherry Blossom** - Handysine Impregnated Sponge or Black Boot Polish
- **Armor All** - Protectant Gloss Finish
- **Simoniz** - Back to Black
- **Turtle Wax** - Black in a Flash
- **Auto Glym** - Vinyl & Rubber Care
- **Meguiars** - Ultimate Protection or Forever Black Reconditioner (USA)

This will help protect the plastic from ultra violet rays, which can cause discolouration over a period of time. Thoroughly clean once a month!

Painting

Rearguards can be painted but you will need to use a flexible primer before applying the top coat.

Removal

Rearguards can be removed but you will need to use a heat gun or hair dryer carefully to warm up the 3M tape which secures it to the bumper. Great care should be taken when using a commercial heat gun as it is possible to blister the paint!

You will possibly break the ABS rearguard during this operation and will leave the tape attached to the bumper. It is better to leave this to a garage or bodyshop.