


YAKIMA QuickBack 2/3



**For Your
Safety**
**Warranty
Registration
on-line**
YAKIMA.com
1032934 Rev. A

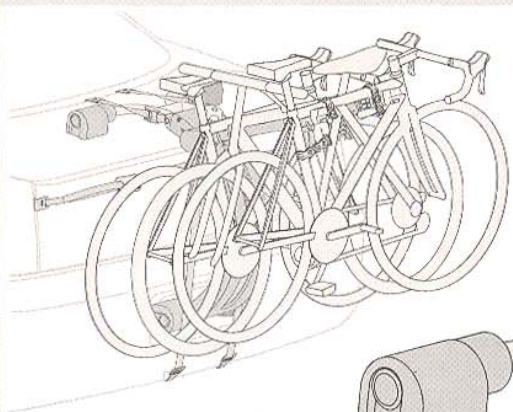


QUICKBACK (1X)

BIKE WHEEL STRAP (1X)



TRUNK SECURITY STRAP (1X)

SOLD SEPARATELY:



**YAKIMA 9FT
SECURITY CABLE**

**(YAKIMA PART
NUMBER 8007233)**


GLASS HATCH ADAPTER (2X)

(For glass or plastic
hatch, or trunk edge.)



IMPORTANT WARNING



IT IS CRITICAL THAT ALL YAKIMA RACKS AND ACCESSORIES BE PROPERLY AND SECURELY ATTACHED TO YOUR VEHICLE. IMPROPER ATTACHMENT COULD RESULT IN AN AUTOMOBILE ACCIDENT, AND COULD CAUSE SERIOUS BODILY INJURY OR DEATH TO YOU OR TO OTHERS. YOU ARE RESPONSIBLE FOR SECURING THE RACKS AND ACCESSORIES TO YOUR CAR, CHECKING THE ATTACHMENTS PRIOR TO USE, AND PERIODICALLY INSPECTING THE PRODUCTS FOR ADJUSTMENT, WEAR, AND DAMAGE. THEREFORE, YOU MUST READ AND UNDERSTAND ALL OF THE INSTRUCTIONS AND CAUTIONS SUPPLIED WITH YOUR YAKIMA PRODUCT PRIOR TO INSTALLATION OR USE. IF YOU DO NOT UNDERSTAND ALL OF THE INSTRUCTIONS AND CAUTIONS, OR IF YOU HAVE NO MECHANICAL EXPERIENCE AND ARE NOT THOROUGHLY FAMILIAR WITH THE INSTALLATION PROCEDURES, YOU SHOULD HAVE THE PRODUCT INSTALLED BY A PROFESSIONAL INSTALLER.

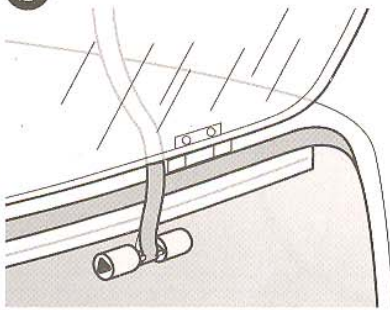C

BEFORE CLOSING THE HATCH...


The pads must be free from contact between hatch door and vehicle's frame.

Straps should be parallel with the top buckles.


**D**

CLOSE THE HATCH.

Pull firmly on the straps to seat the pads.

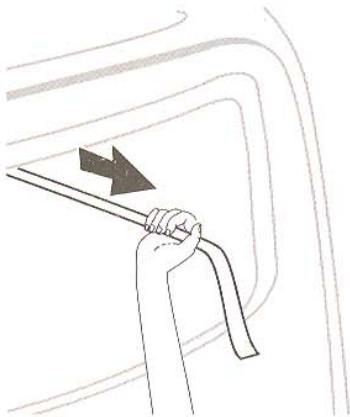**E**


While supporting the carrier with your body, attach the new straps to your carrier's top buckles.

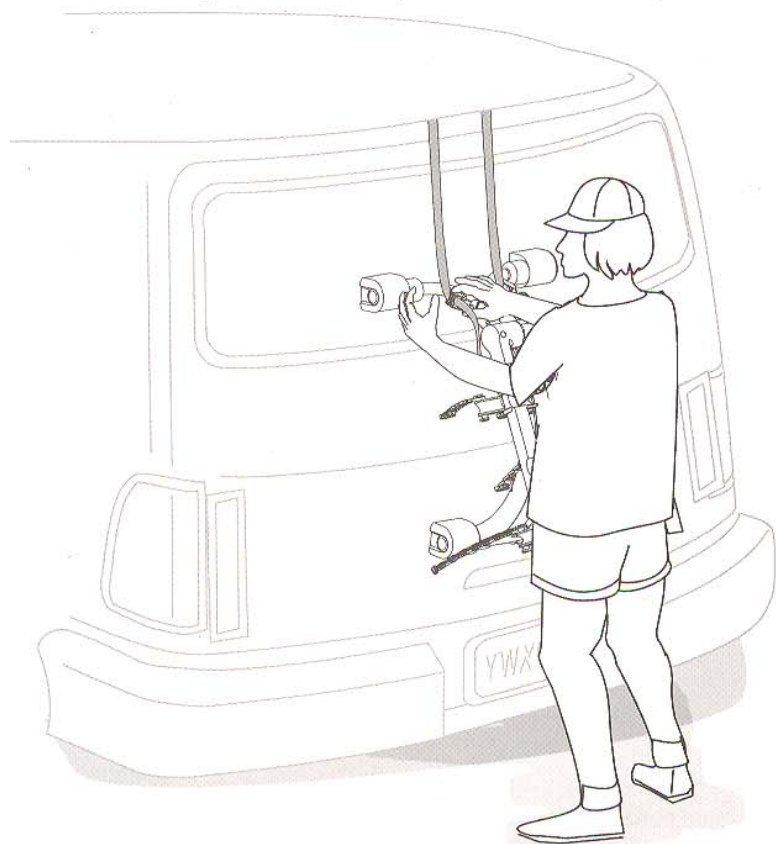**F**

THREAD NEW STRAP-ENDS BACK INTO BUCKLES.





WARNING: Do not pull upper straps sideways!

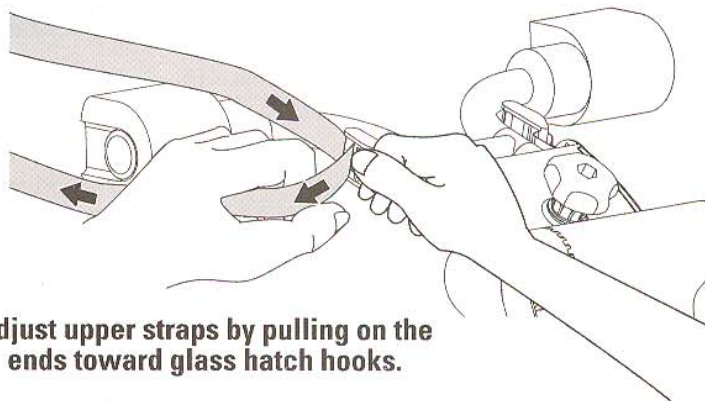

Adjust upper straps by pulling on the ends toward glass hatch hooks.

5 Raise support arm.

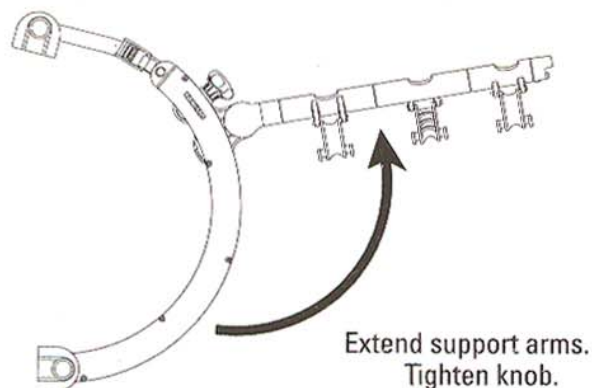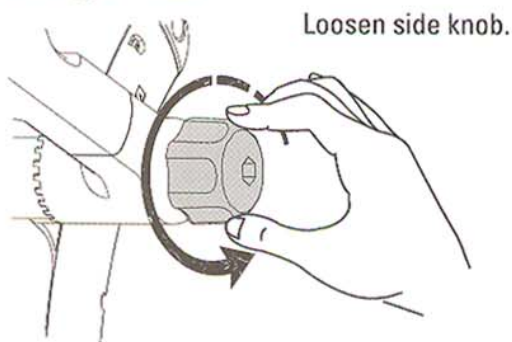


6 Attach lower hooks, and side hooks.


Attach both bottom strap hooks (labeled BOTTOM) to the bottom edge of the trunk, hatch lid, or rear door, the tie down hooks underneath the vehicle, the metal ledge of the bumper, or the metal ledge above tail lights. They should be parallel and pointing directly down.

Note: Placement will vary depending on vehicle.


Adjust straps as necessary to attach side strap hooks (labeled SIDE) to upper side edge of trunk, hatch, rear door, or above, below, or next to the tail lights. They should be horizontal, or close to horizontal. They should be attached at the shortest distance from the edge of the trunk lid to the attachment point on the QuickBack.

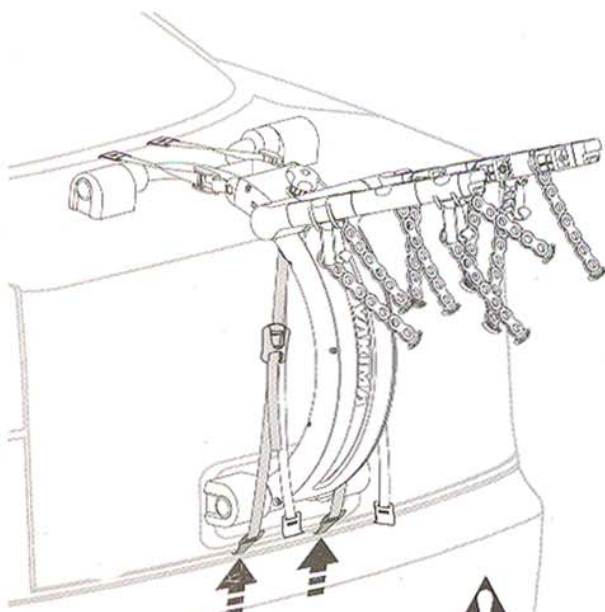

Never place straps near vehicle's hot exhaust.

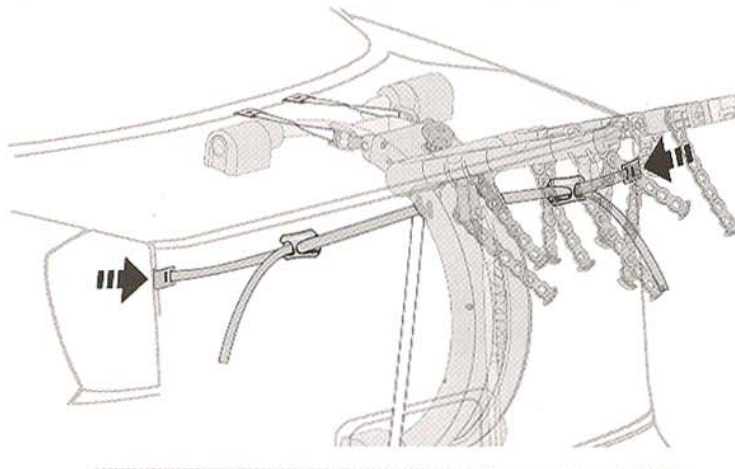



Adjust straps by pulling on free end of straps, or by pressing the release buttons on the buckles.

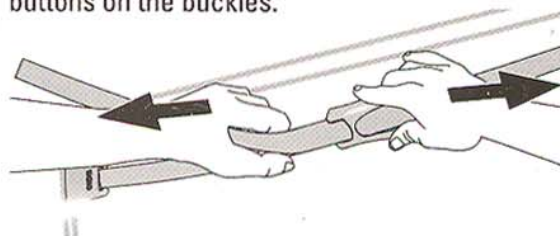

7 TIGHTEN ALL STRAPS COMPLETELY. DO NOT OVERTIGHTEN.

8 Adjust support arms.

Loosen side knob.

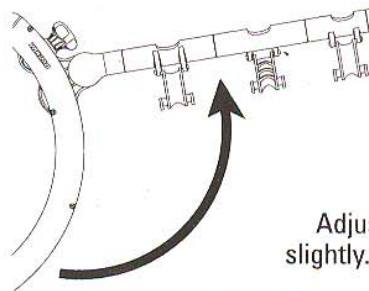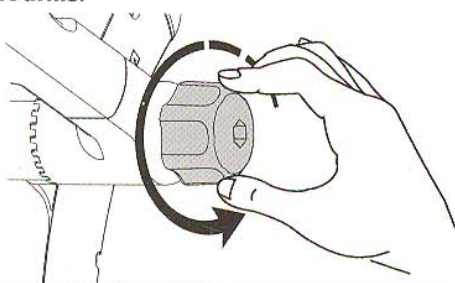


Adjust arms to be tilted up slightly. **Fully tighten side knob.**

9 Load bikes.


Put your bike in place.



 **Load heaviest bike first.**

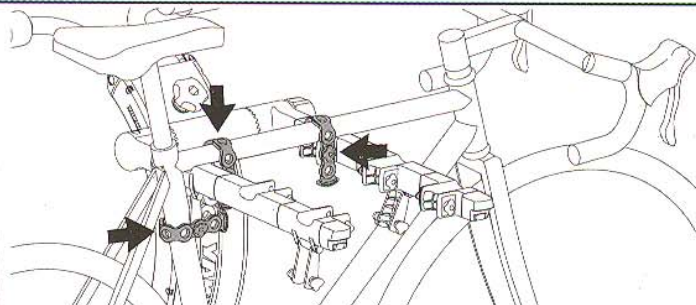

- Match the seat tube to the stabilizing cradle.
- Pull the rubber straps securely over the tubes.

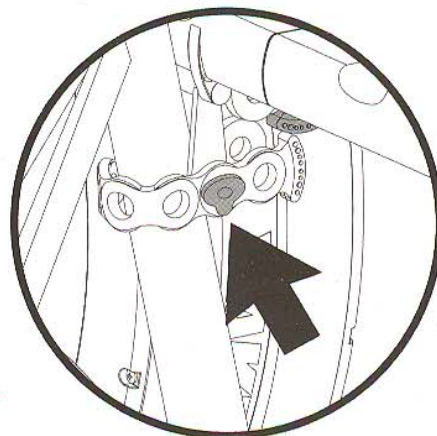


 **Make sure the chain straps are fully engaged!**

10 TIGHTEN TOP, BOTTOM, AND SIDE STRAPS AGAIN, SECURE STRAP ENDS.



TIGHTEN STRAPS AGAIN. THE WEIGHT OF THE LOAD MAY CAUSE STRAPS TO DEVELOP SLACK.



Bundle the extra strap ends.




Secure extra strap ends by inserting the bundle in the clips.



11 To improve stability attach wheel strap.

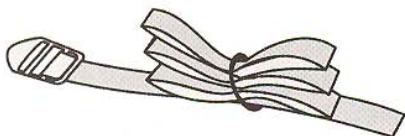

Attach frames of bikes together along with front wheel of bike closest to the vehicle.





Now that you've installed your Yakima QuickBack take a moment to enjoy the beverage of your choice.

Use the built in bottle openers to crack open a cold one!



Lock up your bikes (Yakima 9ft Security Cable Yakima part number 8007233 sold separately).

Thread security cable around QuickBack frame and insert through loop.

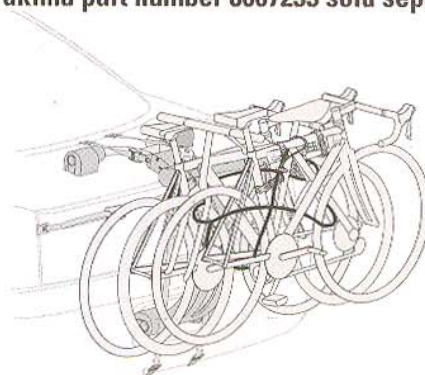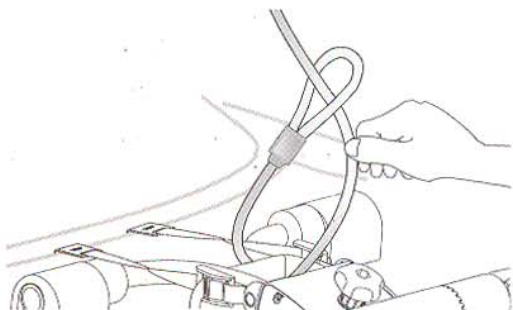

Thread the cable through each bike wheel, and all bike frames.

Insert the slider pin into the lock and lock it.



VERIFY THAT THE PIN IS SECURE BY PULLING ON THE LOCKED CABLE.



WEIGHT LIMITS

QuickBack 2: Two bikes at 35 lbs. (70 lbs. maximum).

QuickBack 3: Three bikes at 30 lbs. (90 lbs. maximum).



CAUTION! BEFORE EACH USE:

- Make sure support arm knob, and sliding arm knob are tight.
- Check strap tension, and while using QuickBack check strap tension OFTEN, tighten with each new load.
- Keep bicycle tires and straps away from vehicle's exhaust.
- Never drive off-road with bicycles loaded.



IMPORTANT guidelines:

- Certain automotive aftermarket products such as spoilers, antennae, etc. may prevent attachment of the carrier.
- Excessive tightening of the strap may cause damage to softer body materials.
- Not recommended for tandems or recumbents.



WARNING: BE SURE ALL HARDWARE IS SECURED ACCORDING TO INSTRUCTIONS. ATTACHMENT HARDWARE CAN LOOSEN OVER TIME. CHECK BEFORE EACH USE, AND TIGHTEN IF NECESSARY.

MAINTENANCE: Use non-water soluble lubricant on screws. Use a soft cloth with water and mild detergent to clean plastic parts.

REMOVE ACCESSORY BEFORE ENTERING AN AUTOMATIC CAR WASH.

**TECHNICAL ASSISTANCE
OR REPLACEMENT PARTS**
Contact your dealer, or visit
www.yakima.com, or call
(888)925-4621
Monday through Friday,
7:00 AM to 5:00 PM, PST



This product is covered by YAKIMA's
"Love It Till You Leave It"
Limited Lifetime Warranty
To obtain a copy of this warranty, go online
to www.yakima.com or email us at
yakwarranty@yakima.com
or call (888) 925-4621

KEEP THESE INSTRUCTIONS!